
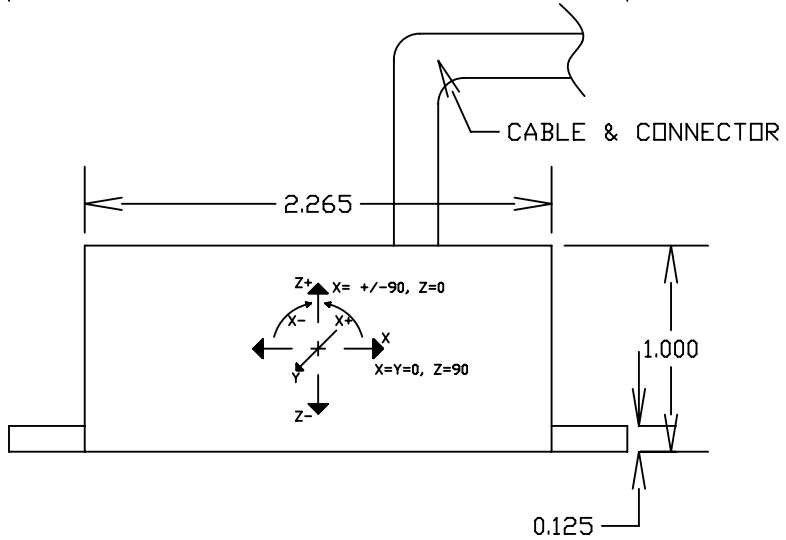



DINC DIMENSIONS & GENERAL PIN OUTS

BOOM ANGLE NOTE:

DINC inclinometer master/
slave module use the
same housing and share
dimensions

DINC slave can be provided
without LED indicators

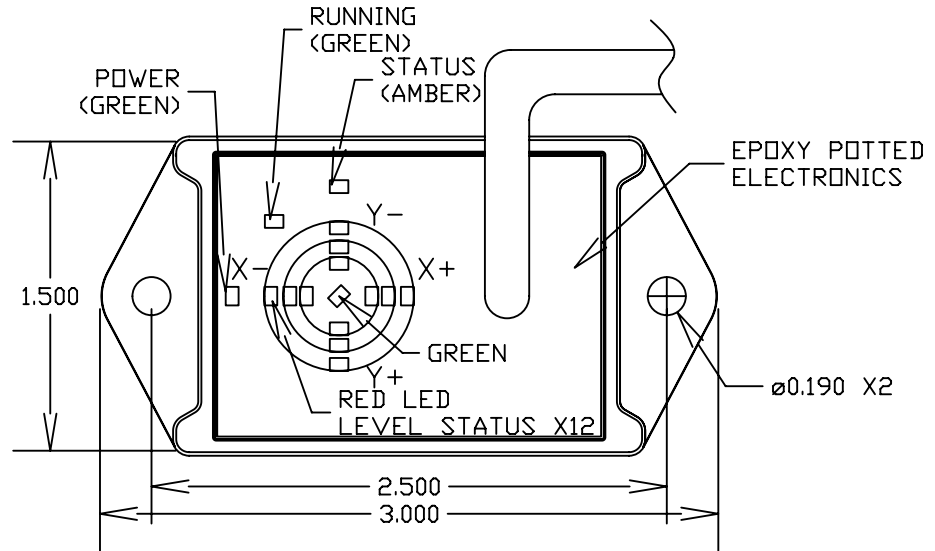


**DT04-4P MALE
FACE VIEW**




- DT04-4P J1939 OUTPUT**
1 = YEL = CAN HIGH
2 = GRN = CAN LOW
3 = RED = +VDC (VIN)
4 = BLK = COMMON/GROUND

**M12-5P MALE
FACE VIEW**



- M12-5P AND 5 CONDUCTOR
CABLE J1939 OUTPUT**
1 = BRN = +VDC (VIN)
2 = WHT = CAN HIGH
3 = BLUE = COMMON/GROUND
4 = BLK = CAN LOW
5 = GRY = OPTIONAL ADDRESS
PROGRAMMING RESISTOR

**DT04-6P MALE
FACE VIEW**



- DT04-6P J1939 OUTPUT**
1 = YEL = CAN HIGH
2 = GRN = CAN LOW
3 = RED = +VDC (VIN)
4 = BLK = ADDRESS GROUND
5 = WHT = ADDRESS PROG. RESISTOR
6 = BLK = COMMON/GROUND

*Dimensions informative only
For most recent dimensions please consult factory*

